

Emtrac

plus!

HI-PERFORMANCE BATTERY



**MAINTENANCE FREE
SILVER ALLOY**

**MADE IN
INDIA**

**High Reserve
Capacity**

**Vibration
Resistance**

**High Cranking
Power**

**Leak Proof
Cover Design**



**High Heat
Tolerance**

**Silver X
Alloy**

Emtrac Plus batteries are manufactured in the state of the art battery plant in India with a current capacity of 6 Mn units automotive batteries & 3 Mn units motorcycle batteries per annum. Plant is fully integrated and has the latest upgraded automation with the collaboration of the world's largest battery manufacturer.

Over 90 % automotive OEM's in India's have approved this plant which is a clear testimony for the quality of the product.

MADE IN INDIA



Part nos	Volt	AH @ C20	AH @ C5	CCA @ - 18 Deg C	RC in Mins	Dimensions in mm		
						L	B	H
B 19 / B20 (NS40Z)								
38B20R	12	35	28	265	43	197	129	227
38B20L	12	35	28	265	43	197	129	227
42B20R	12	35	28	335	55	197	129	227
42B20L	12	35	28	335	55	197	129	227
42B20R BH	12	35	28	335	55	197	129	227
42B20L BH	12	35	28	335	55	197	129	227
50B19R	12	40	32	370	55	187	127	227
50B19L	12	40	32	370	55	187	127	227

Part nos	Volt	AH @ C20	AH @ C5	CCA @ - 18 Deg C	RC in Mins	Dimensions in mm		
						L	B	H
B 24 (NS 60/NS60S/NX-100)								
65B24R	12	50	40	420	74	238	129	227
65B24L	12	50	40	420	74	238	129	227
65B24RS	12	50	40	420	74	238	129	227
65B24LS	12	50	40	420	74	238	129	227
55B24R	12	45	36	380	75	238	129	227
55B24L	12	45	36	380	75	238	129	227
55B24RS	12	45	36	380	75	238	129	227
55B24LS	12	45	36	380	75	238	129	227
46B24R	12	45	36	295	56	238	129	227
46B24L	12	45	36	295	56	238	129	227
46B24LS	12	45	36	295	56	238	129	227
46B24RS	12	45	36	295	56	238	129	227

Part nos	Volt	AH @ C20	AH @ C5	CCA @ - 18 Deg C	RC in Mins	Dimensions in mm		
						L	B	H
D 26 (N 50/N 50Z/NS 70/NX-110)								
100D26R	12	70	56	620	128	260	173	225
100D26L	12	70	56	620	128	260	173	225
100D26R BH	12	70	56	620	128	260	173	225
100D26L BH	12	70	56	620	128	260	173	225
95D26R	12	65	52	600	115	260	173	225
95D26L	12	65	52	600	115	260	173	225
95D26R BH	12	65	52	600	115	260	173	225
95D26L BH	12	65	52	600	115	260	173	225
80D26R	12	60	48	500	110	260	173	225
80D26L	12	60	48	500	110	260	173	225
80D26R BH	12	60	48	500	110	260	173	225
80D26L BH	12	60	48	500	110	260	173	225
65D26R	12	50	40	420	90	260	173	225
65D26L	12	50	40	420	90	260	173	225
65D26R BH	12	50	40	420	90	260	173	225
65D26L BH	12	50	40	420	90	260	173	225

Part nos	Volt	AH @ C20	AH @ C5	CCA @ - 18 Deg C	RC in Mins	Dimensions in mm		
						L	B	H
D 23								
90D23R	12	65	52	560	114	232	173	225
90D23L	12	65	52	560	114	232	173	225
90D23R BH	12	65	52	560	114	232	173	225
90D23L BH	12	65	52	560	114	232	173	225
85D23R	12	60	48	550	110	232	173	225
85D23L	12	60	48	550	110	232	173	225
85D23R BH	12	60	48	550	110	232	173	225
85D23L BH	12	60	48	550	110	232	173	225
55D23R	12	60	48	320	74	232	173	225
55D23L	12	60	48	320	74	232	173	225
55D23R BH	12	60	48	320	74	232	173	225
55D23L BH	12	60	48	320	74	232	173	225


Part nos	Volt	AH @ C20	AH @ C5	CCA @ - 18 Deg C	RC in Mins	Dimensions in mm		
						L	B	H
D 31 (N 70/N 70Z/ NX120-7)								
125D31R	12	95	76	775	165	306	173	225
125D31L	12	95	76	775	165	306	173	225
125D31R BH	12	95	76	775	165	306	173	225
125D31L BH	12	95	76	775	165	306	173	225
115D31R	12	90	72	750	160	306	173	225
115D31L	12	90	72	750	160	306	173	225
115D31R BH	12	90	72	750	160	306	173	225
115D31L BH	12	90	72	750	160	306	173	225
105D31R	12	80	64	670	160	306	173	225
105D31L	12	80	64	670	160	306	173	225
105D31R BH	12	80	64	670	160	306	173	225
105D31L BH	12	80	64	670	160	306	173	225
95D31R	12	70	56	600	125	306	173	225
95D31L	12	70	56	600	125	306	173	225
95D31R BH	12	70	56	600	125	306	173	225
95D31L BH	12	70	56	600	125	306	173	225



Part Nos	Volt	AH @	AH @	CCA @	RC in	Dimensions in mm		
		C20	C5	18 Deg C	Mins	L	B	H

DIN SIZES								
DIN 45	12	45	36	365	76	207	175	175
DIN 50	12	50	40	450	86	207	175	190
DIN 55	12	55	44	500	103	242	175	190
DIN 55 R	12	55	44	500	103	242	175	190
DIN 55(T)	12	55	44	500	95	242	175	175
DIN 60	12	60	48	550	109	242	175	175
DIN 65	12	65	52	590	115	278	175	175
DIN 66	12	66	53	610	121	242	175	190
DIN 66 R	12	66	53	610	121	242	175	190
DIN 74	12	74	59	690	131	278	175	190
DIN 80	12	80	64	730	143	315	175	175
DIN 90	12	90	72	800	162	353	175	190
DIN 100	12	100	80	900	181	353	175	190

COMMERCIAL SIZES								
N100R	12	100	80	700	195	410	176	234
N100L	12	100	80	700	195	410	176	234
N120R	12	120	96	750	240	513	182	237
EMP 700	12	100	80	700	180	359	173	240
EMP 800	12	130	104	800	240	540	222	240
EMP 150	12	150	120	1000	300	540	222	240
EMP 165	12	165	132	1050	325	540	222	240
EMP 180	12	180	144	1150	355	540	222	240

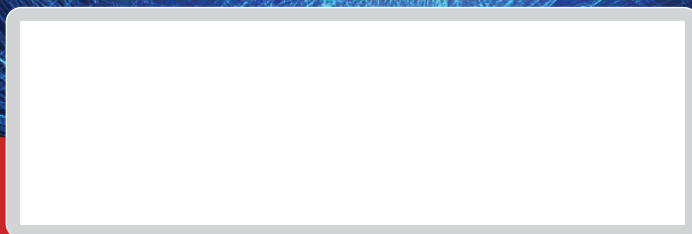

Customers globally experience higher cranking ability, longer life & Zero Maintenance with Emtrac Plus Batteries.